## (19) World Intellectual Property Organization International Bureau





(43) International Publication Date 2 June 2005 (02.06.2005)

**PCT** 

## (10) International Publication Number WO 2005/050237 A1

(51) International Patent Classification<sup>7</sup>:

G01R 33/34

(21) International Application Number:

PCT/IB2004/052290

(22) International Filing Date:

3 November 2004 (03.11.2004)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 60/520,880

18 November 2003 (18.11.2003)


(71) Applicant (for all designated States except US): KONIN-KLIJKE PHILIPS ELECTRONICS, N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

- (71) Applicant (for AE only): U.S. PHILIPS CORPORA-TION [US/US]; 1251 Avenue of the Americas, New York, New York 10020 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): LEUSSLER, Christoph, G. [DE/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

- (74) Common Representative: KONINKLIJKE PHILIPS ELECTRONICS, N.V.; c/o LUNDIN, Thomas, M. 595 Miner Road, Cleveland, Ohio 44143 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: HYBRID TEM/BIRDCAGE COIL FOR MRI

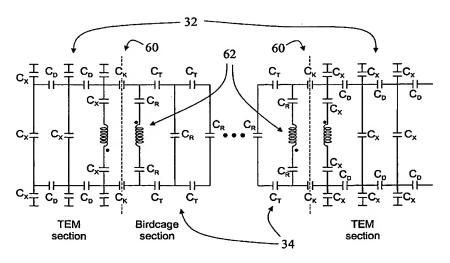

(57) Abstract: A radio frequency coil (30, 30', 120, 120') for a magnetic resonance imaging system (10, 10") includes a birdcage section (34, 122, 122') having a plurality of parallel spaced apart conductors (46, 130, 130') and one or more cross or end conductors (48, 132, 144', 154, 156) aligned generally transverse to the spaced apart conductors (46, 130, 130'), and a TEM section (32, 32', 32", 124, 124') having a plurality of parallel spaced apart conductors (40, 40', 140) and a radio frequency screen (42, 142, 144, 144'). The birdcage section (34, 122, 122') and the TEM section (32, 32', 32", 124, 124') resonate at a birdcage resonant frequency and a TEM resonant frequency, respectively. The birdcage section (34, 122,122') and the TEM section (32, 32', 32", 124, 124') are relatively disposed with the parallel spaced apart conductors of each section aligned and define a subject receiving region.





## Declaration under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ,

BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

## Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.